



PRODUCT TECHNICAL DATA SHEET

SW735 Rubberized Undercoating Spray

DESCRIPTION: No. 735 Rubberized Undercoating Spray is an ideal protectant for coating fender replacements, new panels, section repairs, undercarriage, and weld joints. Leaves a paintable surface. The spray prevents rust, deadens sound and seals out moisture quickly and easily. In addition, it resists salt corrosion.

USES: Other uses for the undercoating spray include: crack sealer for concrete and asphalt driveways; gutter and flashing sealer; roof patch; planters; post and wood preserver; tree wound dressing.

SPECS:

Can Size: 20 oz.

Net Weight: 16 oz.

Shipping Weight: 16 lbs.

Packaged: 12 cans per case

UPC Number: 0 41911 00735 1

SAP Number: 1000009767

**PHYSICAL
CHARACTERISTICS:**

Color: Black liquid

Fragrance: Petroleum odor

REGULATORY:

Shelf Life: 1 Year +

Recyclable Packaging: Yes

VOC Compliant CARB/OTC: Yes

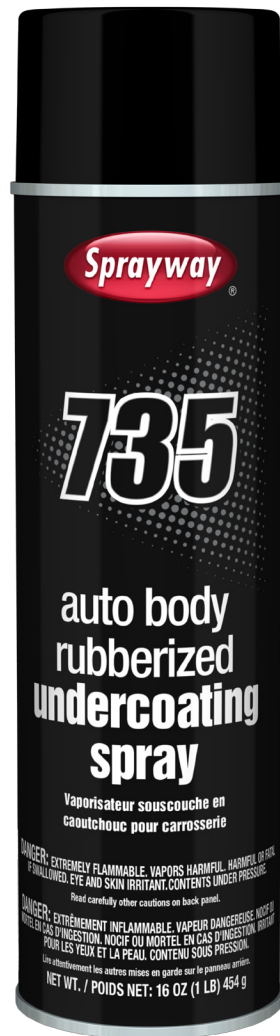
CPSC Flammability: Required to be labeled as
extremely flammable per
16 CFR 1500

24 HR. MEDICAL EMERGENCY: 1-866-836-8855

FEATURES:

- SEALS OUT MOISTURE
- RETARDS RUST
- DEADENS SOUND
- PAINTABLE

See label side panel for First Aid and additional precautionary statements.

KEEP OUT OF REACH OF CHILDREN. CONSULT SDS BEFORE USING

REORDER/ITEM NUMBER SW-735

Manufactured by: **SPRAYWAY, INC.**
2651 Warrenville Rd. Ste 300 | Downers Grove, IL 60515
800-332-9000 • Fax: 630-543-7797 • www.spraywayinc.com

JAN-17-2025